

Halton SLM – Linear slot diffuser



Overview


- Horizontal or vertical plane jet air supply
- Suitable for supply and exhaust
- Special profile diffuser blade creates a Coanda effect which enables wide range of airflow rates
- Supply in one or two directions
- The product can handle high airflow rates with low noise level
- Ceiling or wall installation, suitable also for continuous “wall to wall” installations
- Adjustable throw pattern, flexibility of orientation with different configurations
- Detachable diffuser allows cleaning of the terminal unit and ductwork

Accessories


- Plenum with a circular duct connection(s) D160...250mm with rubber gasket
- Plenum options with measurement and adjustment functions
- Sound attenuation for plenum

Dimensions

Halton SLM

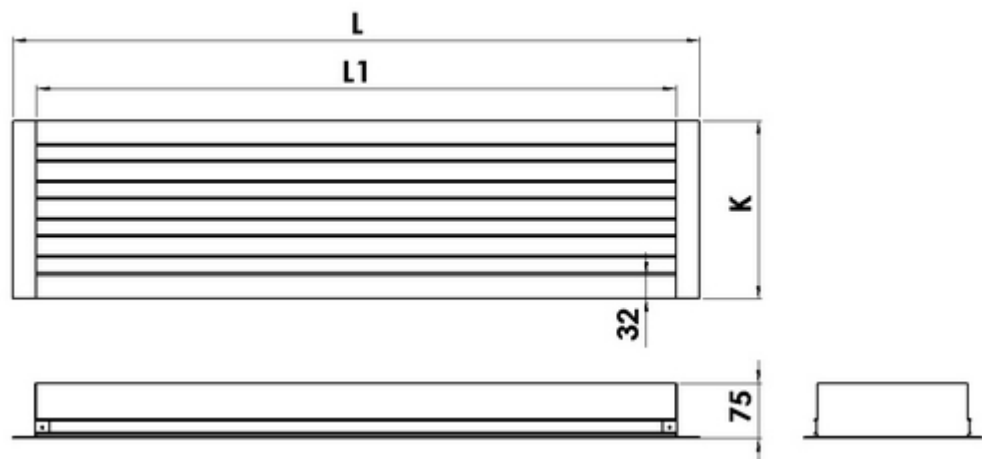

Halton SLM + Halton PLM

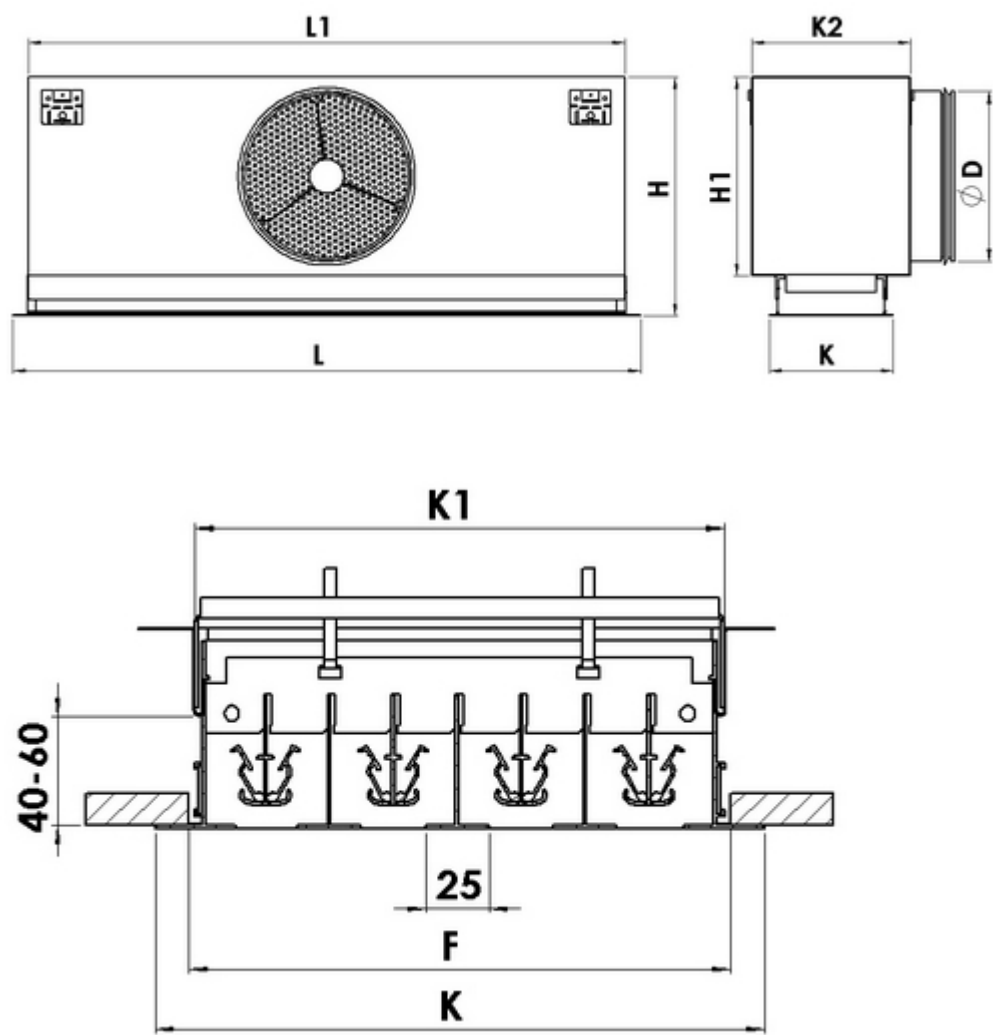

Standard dimensions of the Halton SLM + Halton PLM are presented in the table below :

Active length	Slots	F	L	L1	H	H1	K	K1	K2	ØD
572	1	64	636	572	275..295	200	90	59	130	1×160
872	1	64	936	872	275..295	200	90	59	130	1×160
1172	1	64	1236	1172	275..295	200	90	59	130	1×160
1472	1	64	1536	1472	275..295	200	90	59	130	2×160
1772	1	64	1836	1772	275..295	200	90	59	130	2×160
572	2	114	636	572	315..335	240	141	109	181	1×200
872	2	114	936	872	315..335	240	141	109	181	1×200
1172	2	114	1236	1172	315..335	240	141	109	181	1×200
1472	2	114	1536	1472	315..335	240	141	109	181	2×200
1772	2	114	1836	1772	315..335	240	141	109	181	2×200
572	3	165	636	572	365..385	290	192	160	232	1×200
872	3	165	936	872	365..385	290	192	160	232	1×200
1172	3	165	1236	1172	365..385	290	192	160	232	1×200
1472	3	165	1536	1472	365..385	290	192	160	232	2×200
1772	3	165	1836	1772	365..385	290	192	160	232	2×200
572	4	216	636	572	365..385	290	243	211	283	1×250
872	4	216	936	872	365..385	290	243	211	283	1×250
1172	4	216	1236	1172	365..385	290	243	211	283	1×250
1472	4	216	1536	1472	365..385	290	243	211	283	2×250
1772	4	216	1836	1772	365..385	290	243	211	283	2×250

Installation hole for the ceiling: F x (L1+10)

Material


Part	Material	Finishing	Note
Outer frame	Aluminium	Mill finished or Epoxy-painted, White (RAL 9003 / 30% gloss)	Special colours available. Epoxy/Polyester painted as option
End caps / T profiles	Aluminium	Mill finished or Epoxy-painted, white (RAL 9003 / 30% gloss)	Special colours available. Epoxy/Polyester painted as option
Inner vanes	Aluminium	Mill finished or Epoxy-painted, white (RAL 9003 / 30% gloss)	Special colours available. Epoxy/Polyester painted as option
Flow deflection vanes (for supply application)	Aluminium	Mill finished	Special colours available. Epoxy/Polyester painted as option
Plenum	Galvanised steel	–	–

Accessories

Accessory	Code	Description
Plenum	PLM	Plenum for duct connection (with or without attenuation material)
Plenum	PMM	Plenum for duct connection (without attenuation material)
End caps	N2, O3	For modular ceiling, Width = 23 mm (1 or 2 pcs)
Installation brackets	–	For installation of the diffuser with a PLL or PLD plenum
Staff brackets	–	For installation of the diffuser without plenum

Special end caps are available for modular ceilings.

Function

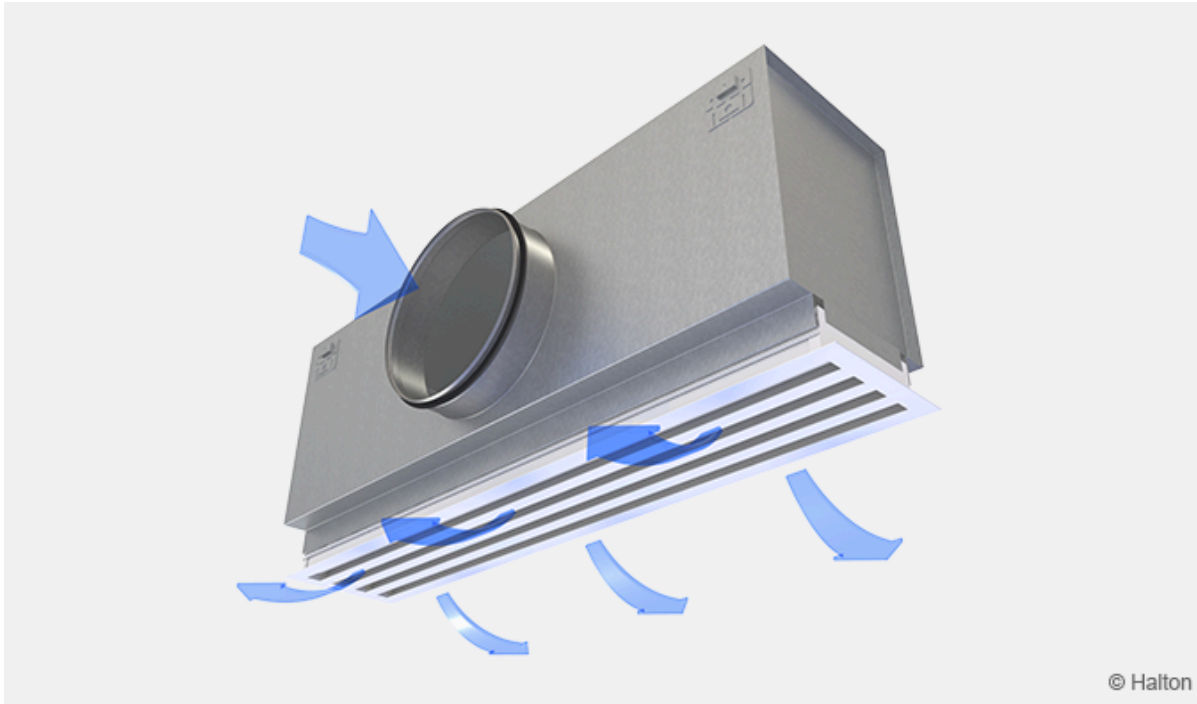


Supply air is supplied through the linear slots of the diffuser horizontally along the ceiling surface or vertically into the occupied zone.

For wall installation, the plane jet air is supplied horizontally or directed to the ceiling surface, which increases the throw length.

For an exhaust application, the diffuser is supplied without flow control vanes.

Installation

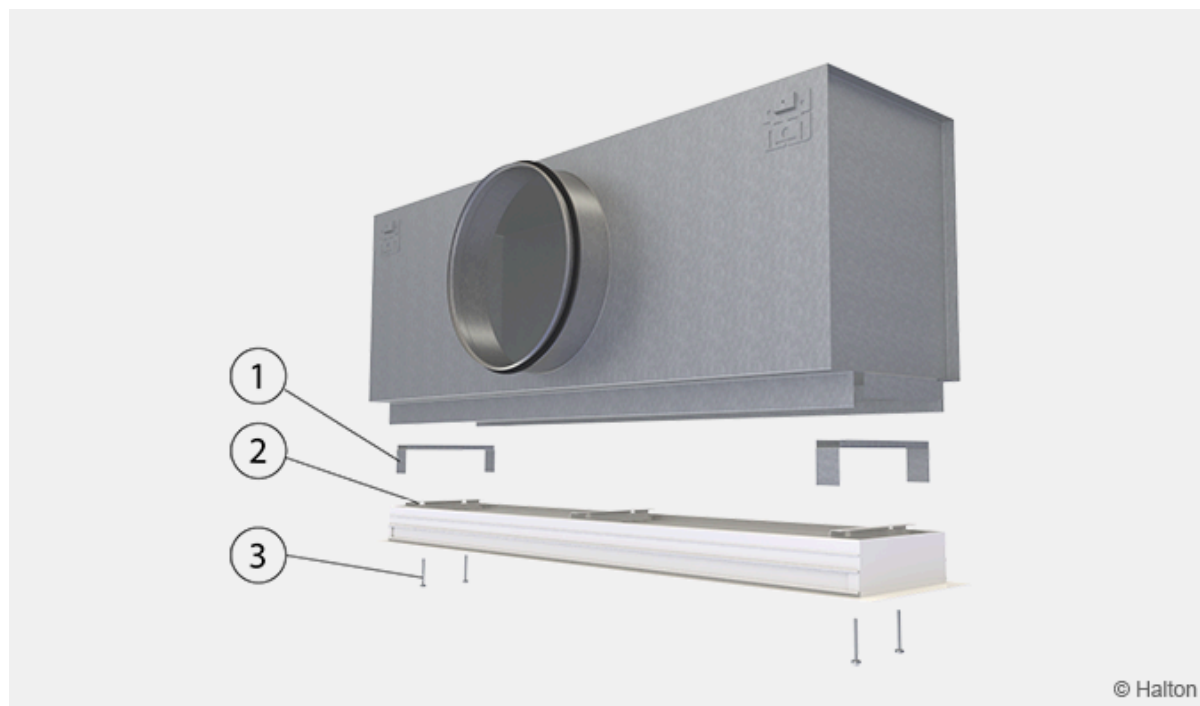

Key

1. Mounting bracket
2. Transversal bar
3. Screw

The Halton SLM linear slot diffuser is connected directly to the Halton PLM or Halton PMM plenum. The plenum is installed into the suspended ceiling with M8 drop rods (not included in the delivery) and connected to the ductwork.

Remove the T-profiles of the Halton SLM by pulling them gently, in order to access the transversal bars located behind the profiles.


Fit the installation brackets into the grooves of the plenum and secure with the screws supplied with the unit.

Put screws into the holes of the transversal bars. Screw on until the diffuser is flush to the ceiling. Replace the T-profiles.

The unit can be installed without plenum using the staff brackets. Those pieces are available as accessory (2 by slat or by linear meter).


String course mounting

The maximum length is 2000 mm. So when length is superior to 2000 mm, it is necessary to place side by side several pieces. Some alignment guides are given in order to make the the mounting easier.

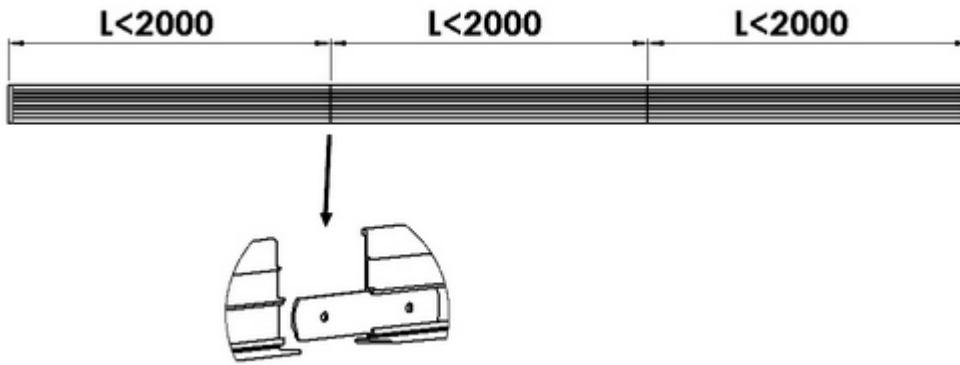

Adjustment

The air pattern can be changed through 180° by adjusting the flow deflection vanes using a screwdriver. Each deflection vane section can be individually adjusted without removing the T-profiles in order to provide flexibility in supply air pattern orientation. Diffusers are delivered unadjusted with the flow deflection vanes in the open position.

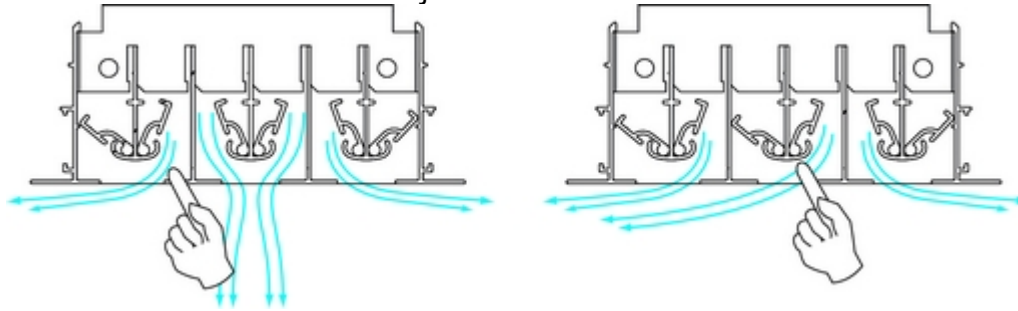

To aid in adjusting and measuring the airflow rate, it is recommended that the diffuser is connected to a plenum equipped with a MSM.

The supply airflow is determined by measuring the pressure difference with a measurement module.

Measure the differential pressure with a manometer. The airflow rate is calculated according to the following formula:

$$q_v = k * \sqrt{\Delta p_m}$$

Δp_m Measured pressure [Pa]

k Factor given as a function of mounting and diameter

Q_v Airflow rate [l/s]

The k factor for installations with different safety distances
(distance of other items from the MSM):

NS	Safety distance	
	> 6xD	min 3xD
160	19	22
200	49	32
250	51	51

Adjust the airflow rate by rotating the control spindle until the desired setting is achieved.
 Lock the damper in position with a screw.
 Replace the tubes and spindle in the plenum, and return the linear diffuser to its position.

Servicing

Remove the T-profiles.
 Remove the linear diffuser by unscrewing the screws of the transversal bars.
 Clean the parts by wiping them with a damp cloth.
 Push the linear diffuser back into place by screwing the transversal bars to the installation brackets.

Option:

With balancing plenum Halton PLM + MSM/MEM or Halton PMM + MSM/MEM

Remove the measurement and adjustment module by gently pulling the shaft; (not the control spindle or measurement tubes!).
 Wipe the parts with a damp cloth, instead of immersing in water.
 Reassemble the measurement and adjustment module by pushing the shaft back into place until the module meets the stopper.
 Push the linear diffuser back into place by screwing the transversal bars to the installation brackets.

Specification

Halton-brand ceiling diffuser, type Halton SLM, with one to four slots, suitable for variable airflow

Excellent coanda effect provided with a wide range of airflow rates.
 Each air pattern adjustment section shall comprise two flow deflection vanes.
 The supply air pattern is directable by adjusting the flow deflection vanes without any change in the appearance of the diffuser.

The linear slot diffuser has an extruded aluminium outer frame, flow deflection vanes and T-profiles, and or polyester-painted to white (RAL 9003) colour.
 The diffuser is connected to the ductwork using a plenum with mineral wool as sound attenuation material.

The removable linear slot diffuser is mounted into the plenum with invisible screws.
The plenum comprises an airflow measurement and adjustment module.

The linear diffuser is removable in order to provide access to the measurement and adjustment module in the plenum.

Flow deflection vanes and T-profiles are easily removable for access to the plenum.

Order code

SLM/S-N-L; FP-SE-ST-FI-CO-ID-ZT

S = Model

- S Supply
- E Exhaust
- O Opening front

N = Number of slots

1, 2, 3, 4

L = Active length (mm)

400, +1, ..., 50000

Other options and accessories

FP=Front plate option (available from Crépy factory)

- N No
- TC TC Ceiling
- FC Fineline Ceiling

SE = End caps

- Y Yes
- N No

ST = Type of end caps

- NA Not assigned
- N2 Standard (32 mm)
- O3 Only one end cap (32 mm)

FI = Finishing

- PN Painted
- MF Mill finished

CO = Colour

- SW Signal white (RAL 9003)
- X Special colour (RAL xxxx)
- N No painting

ID = Diffuser assembled with plenum (available from Crépy factory)

N No

Y Yes

ZT = Tailored products

N No

Y Yes (ETO)

Sub products

PLM Plenum

PMM Plenum

Code example

SLM/S-1-400, FP=N, SE=Y, ST=N2, FI=PN, CO=SW, ID=N, ZT=N