

FDL A0(A60) FIRE DAMPER

For offshore, marine and navy ventilation systems



MATERIALS

PART	MATERIAL	FINISHING
Frame	Carbon steel	Painted or galvanised
Frame	Stainless steel EN 1.4301 (AISI304), EN 1.4404 (AISI316L), EN 1.4432 (AISI316L)	-
Blades	Steel	Galvanized
Blades	Stainless steel EN 1.4301 (AISI304), EN 1.4404 (AISI316L), EN 1.4432 (AISI316L)	-
Maintenance-free bearings	Stainless steel EN 1.4404 (AISI316L)	-
Shafts	Stainless steel EN 1.4404 (AISI316L)	-

FDL PRODUCT OPTIONS

Halton FDL is available with following actuators:

- FDL-EL: Electrical spring return motor; standard actuators being 24 V or 230 V or 120 V. The motor contains built-in open-closed limit switches. Separate junction box included in the EL-model. A wide range of Ex actuators available, including a one second closing time function as an option.
- FDL-PNR: Pneumatic rotating actuator
- FDL-SP: Manual spring-actuated damper with fusible link

DOT: manual override function available for PNR and EL models.

HSO: Halton Smart Override function for HVAC damper black-start available for PNR and EL models. With automatic reset function when power and/or pneumatic air supply is reinstated.

A wide range of accessories available.



APPLICATIONS

Halton FDL fire dampers are type-approved class A0(A60) fire dampers for use in offshore, marine and navy ventilation systems. The FDL can be installed in rectangular or circular ducts. The FDL dampers are used to prevent the spread of fire within the ventilation ductwork. All fire dampers have a fusible link and spring return actuator. When the blades are in the open position, the device does not cause significant pressure loss or flow disturbance. Fire dampers are set from outside and can be installed in any position. An open-closed indicator is visible on the outside of the damper. Fire dampers with non-standard dimensions can also be supplied on request.

FEATURES

- Type-approved by most recognized classification societies: class A0 without insulation, A15-A60 when suitably insulated
- Shock and vibration tested
- Blades with intumescent seals
- A closed damper fulfils the requirement of leakage class (EN1751:2014) from class 1 to class 2 depending on the size. Details are available from Halton Marine
- Casing leakage (EN1751:2014) class B
- The nominal fuse release temperatures are 50 °C, 74 °C or 100 °C. Other temperatures are available
- Can be installed in any position
- Automatic electrical, pneumatic or spring operation system available
- Maximum duct pressure for damper construction 5000 Pa and maximum air velocity 15 m/s
- Normal operation temperature for damper between -50 °C to +80 °C. Actuator and component selection can affect this temperature range. Other temperatures available on request
- Available as ATEX approved
- SIL 2 safety assessment certificate available on specific terms

GENERAL FDL DRAWINGS

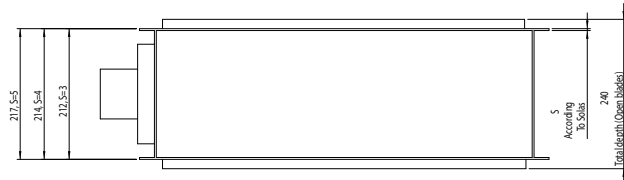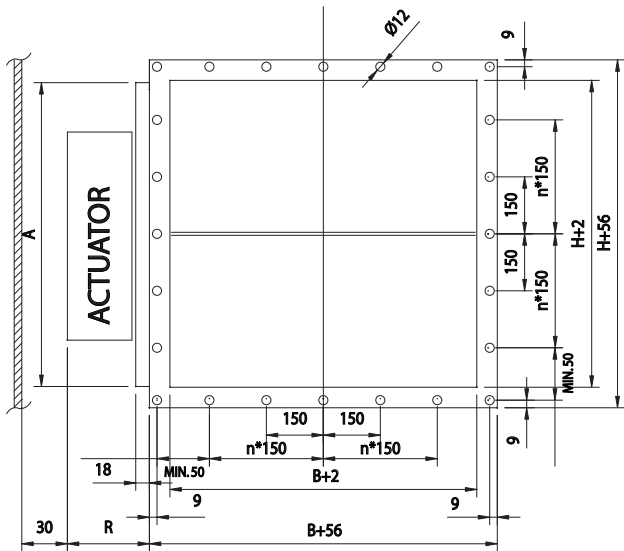

DAMPER H	TOTAL DEPTH WITH BLADES OPEN
< 250 mm	212 mm
≥ 250 < 300 mm	250 mm
≥ 300 < 350	212 mm
≥ 350	240 mm


FDL DIMENSIONS AND MATERIAL THICKNESS

The Halton FDL fire dampers are manufactured according to international standards for both rectangular (width B 100-1300 mm and height H 100-1200 mm, 1 mm division) and circular ducts (Ø100-1250 mm). Modular constructions are available for bigger sizes. Modular construction sizes up to 2660x2460 mm. Non-standard dimensions and flange drilling are available on request. Standard flange width 27 mm. Flanges and drilling also available according to ISO 15138 standards. Frame material thickness 3 mm or 3-5 mm according to SOLAS. Blades are made of two sheets, each of being 1 mm thick (sandwich design).


FRAME THICKNESS ACCORDING TO SOLAS

DIMENSIONS	S
If B or H ≥ 100 and ≤ 449	3
If B or H ≥ 450 and ≤ 649	4
If B or H ≥ 650	5

FDL CIRCULAR CONNECTIONS

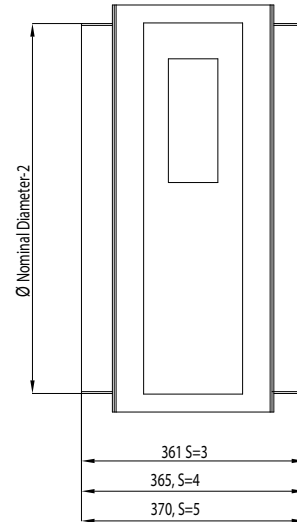

FDL CIRCULAR, WITH CONNECTION FLANGES

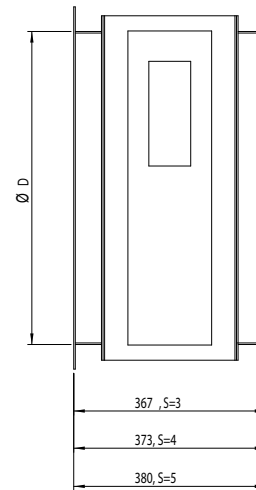

ACTUATOR EFFECT ON DIMENSIONS


ACTUATOR		DIMENSIONS	
		R	A
Electrical	BF230, BF24, BF120	100	H ≤ 300 = 300 H > 300 = H
Pneumatic PNR	Pneumatic rotating actuator AT100	170	H ≤ 300 = 300 H > 300 = H
Pneumatic PNR	Pneumatic rotating actuator AT200	190	H ≤ 350 = 350 H > 350 = H
Spring	Spring	140	H

The above table contains only some examples of actuators and their effect on dimensions.

EDITION DEC. 2015

DIMENSIONS	S
If A < 0.075 m ²	3
If A ≥ 0.075 and A ≤ 0.45 m ²	4
If A > 0.45 m ²	5

GENERAL FDL MODULE ASSEMBLY

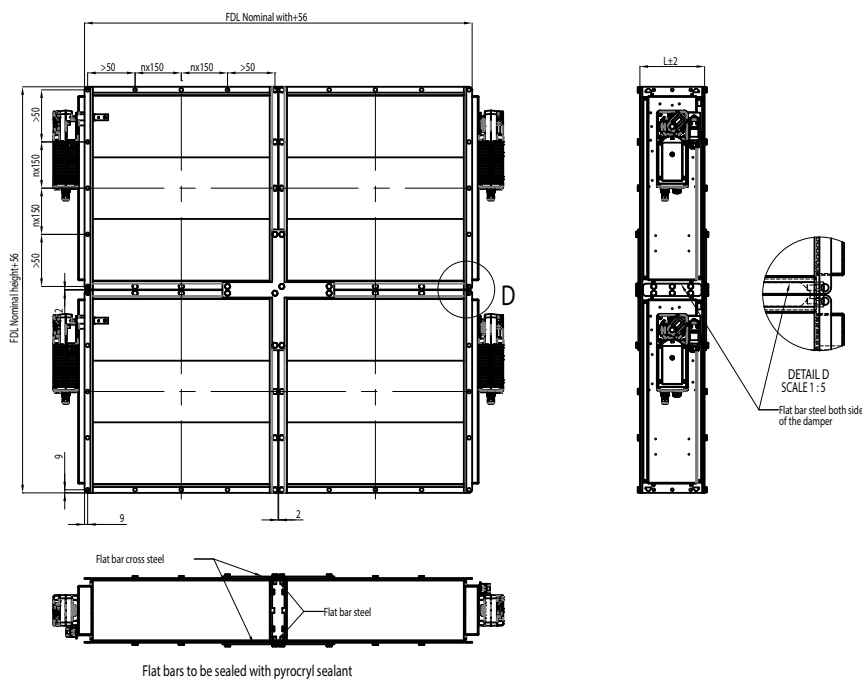

FDL size limitation: Nominal width 2660 mm x nominal height 2460 mm

OPERATION PRINCIPLE

In the event of a temperature rise in ductwork:

- FDL-EL: fusible link releases and cuts off operating voltage to the spring return motor, allowing the spring to close the damper blades. The fire damper opens automatically when the fuse has been changed and the operating voltage to the motor is re-established.
- FDL-PNR: fusible link releases and cuts off operating pressure to the spring return actuator, allowing springs to close the damper blades. The fire damper opens automatically when the fuse has been changed and the pneumatic air supply is re-established.
- FDL-SP: fusible link releases allowing the spring to close the damper blades. When the fuse has been changed, the fire damper must be reset into open position manually.

WEIGHTS

STANDARD HALTON MARINE FDL DAMPERS (KG) without an actuator

H/HEIGHT mm	B / WIDTH (mm)														D2 ØD mm	WEIGHT kg
	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300			
100	5 (5)	7 (7)	9 (9)	10 (10)	12 (13)	14 (15)	15 (22)	17 (25)	19 (27)	20 (30)	22 (32)	24 (35)	25 (37)	100	8 (8)	
200	7 (7)	9 (9)	11 (11)	12 (12)	14 (16)	16 (18)	18 (26)	20 (28)	22 (31)	23 (34)	25 (36)	27 (39)	29 (41)	125	8 (8)	
300	9 (9)	11 (11)	13 (13)	15 (15)	17 (19)	19 (21)	21 (30)	23 (32)	25 (35)	27 (38)	29 (41)	31 (43)	33 (46)	160	12 (12)	
400	11 (11)	13 (13)	15 (15)	17 (17)	20 (22)	22 (24)	24 (33)	26 (36)	28 (39)	30 (42)	32 (45)	34 (48)	37 (51)	200	13 (13)	
500	13 (16)	16 (19)	18 (22)	21 (25)	23 (27)	25 (30)	28 (38)	30 (41)	32 (44)	35 (47)	37 (50)	39 (54)	42 (57)	250	19 (19)	
600	15 (18)	18 (21)	20 (24)	23 (27)	25 (30)	28 (33)	30 (41)	33 (45)	35 (48)	38 (51)	40 (55)	43 (58)	46 (61)	315	20 (20)	
700	18 (25)	21 (28)	23 (32)	26 (35)	29 (39)	32 (42)	34 (46)	37 (50)	40 (53)	42 (57)	45 (60)	48 (64)	51 (67)	400	27 (27)	
800	20 (27)	23 (31)	25 (35)	28 (38)	31 (42)	34 (46)	37 (50)	40 (53)	43 (57)	46 (61)	49 (64)	51 (68)	54 (72)	500	35 (43)	
900	22 (31)	25 (35)	28 (39)	32 (42)	35 (46)	38 (50)	41 (54)	44 (58)	47 (62)	50 (66)	53 (70)	56 (74)	59 (78)	630	46 (62)	
1000	24 (33)	27 (37)	31 (41)	34 (45)	37 (50)	40 (54)	44 (58)	47 (62)	50 (66)	53 (70)	57 (74)	60 (78)	63 (82)	800	62 (89)	
1100	26 (36)	30 (41)	33 (45)	37 (49)	40 (54)	44 (58)	47 (62)	51 (67)	54 (71)	58 (75)	61 (79)	65 (84)	68 (88)	1000	83 (118)	
1200	28 (39)	32 (44)	36 (48)	39 (52)	43 (57)	46 (61)	50 (66)	54 (70)	57 (75)	61 (79)	65 (84)	68 (88)	72 (92)	1250	113(162)	

(Frame thickness according to SOLAS)

Examples of actuator weights: FDL-EL BF230 +3,2 kg, BFN +1,4 kg, ExMax /Redmax +3,5 kg, CSQP +3 kg, FDL-PNR AT100 +2,1 kg, AT100 as AISI316 +4,4 kg, AT200 +3,2 kg, AT200 as AISI316 +6,2 kg, FDL-SP +1 kg. Control enclosure +4 kg.