


NEW! Halton Jaz JWC – Swirl diffuser

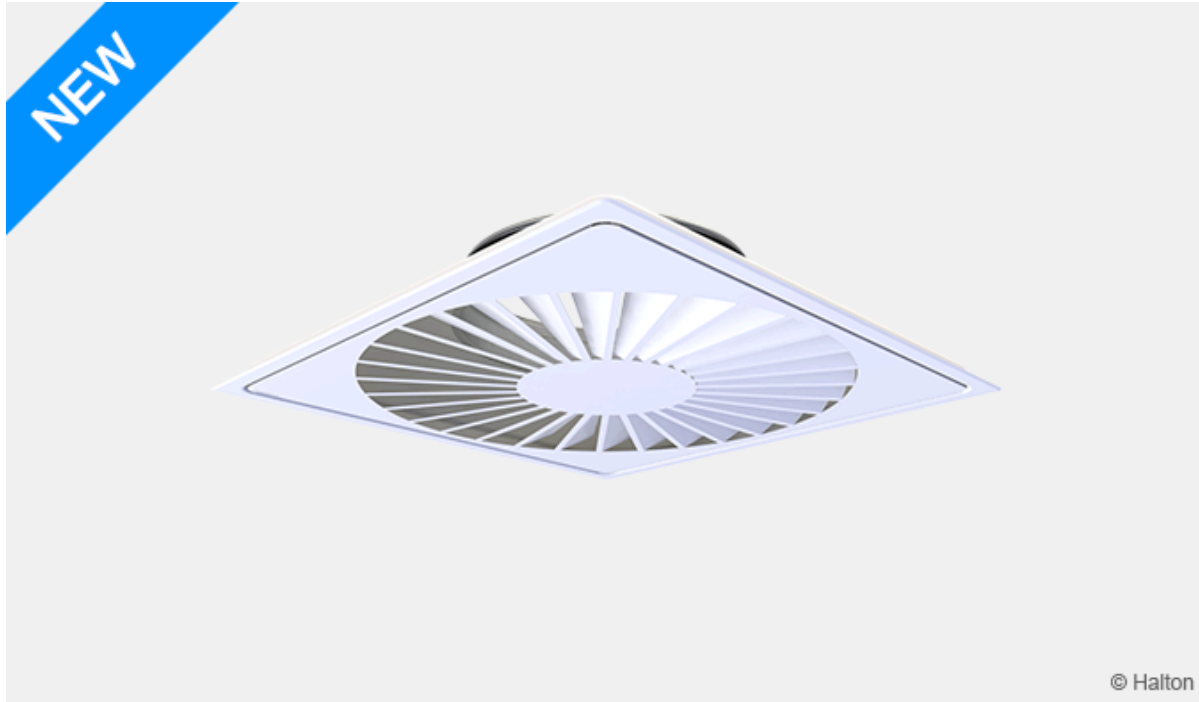

Overview

Halton Jaz JWC is a square diffuser that supplies air in a swirl pattern. It is suitable for suspended ceiling installation. It has been carefully designed and tested in the Halton Innovation Hub to ensure silent operation even with large airflows.

Application area

- Ventilation in offices, hospital rooms, schools, and public spaces.

Key features

- Swirl function with fixed blades
- Silent function also with large airflows
- Adjusting and measuring with balancing plenum Halton Pop PDI

Operating principle

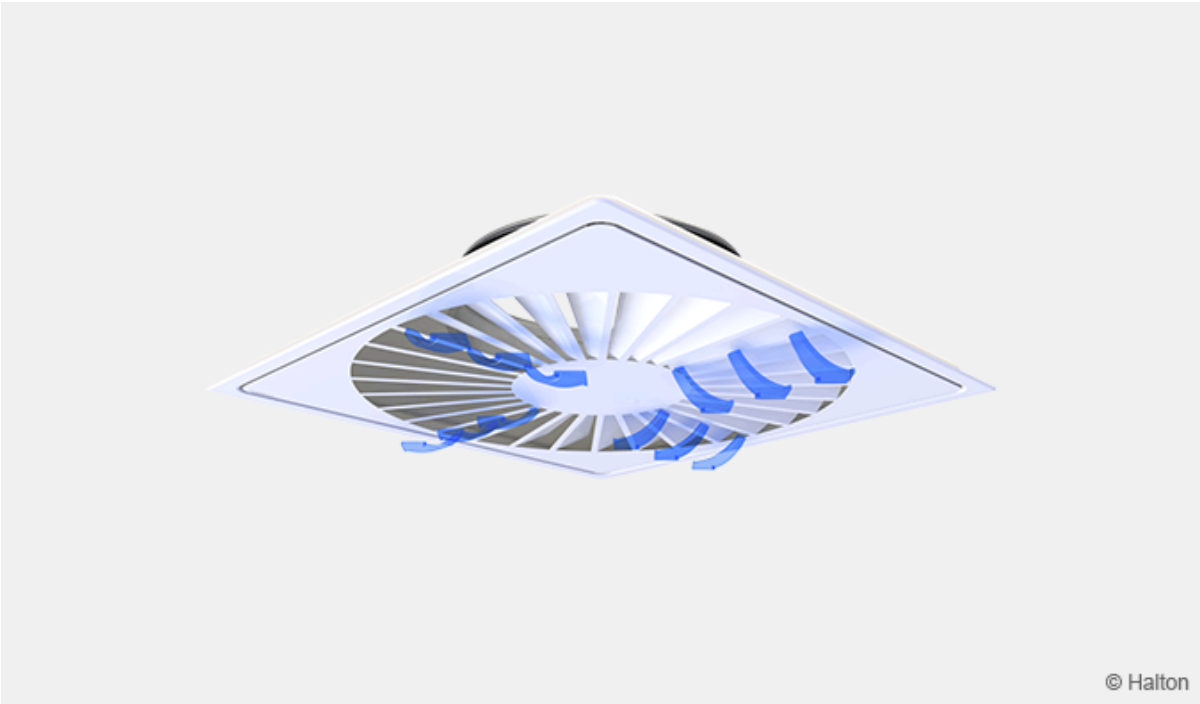


Fig. 1. Operating principle of Halton Jaz JWC

Air is supplied into the space through tangentially oriented fixed blades, which leads to swirl function of the throw pattern. The function generates high induction rate, which reduces the supply air jet velocity effectively.

Key technical data

| Feature | Description |
|--------------|--|
| Airflow rate | Max. airflow rate 135 l/s or 490 m ³ /h, <35 dB |
| Dimensions | 595 x 595 mm |
| Weight | 4.4 – 4.5 kg |

Features and options

| Catergory | Feature (order code) | Option (order code) | Description |
|---|---------------------------------|------------------------|---|
| Diffuser | Duct connection size (D) | 160, 200, 250 or 315 | Four nominal duct connections sizes. Units are in millimetres. |
| | Diffuser size (A) | 600 | 595x595x70 mm. Available with all duct connection sizes. |
| Balancing plenum PDI (subproduct [*]) | Model (M) | S | With supply airflow adjustment and measurement module MSM |
| | | E | With exhaust airflow adjustment module MEM |
| | | N | Without airflow adjustment module |
| | Sizes | D | Plenum's duct connection size. It can be either the same or one size bigger than diffusers duct connection. |
| | | E | Diffuser connection size. Must be the same size than diffusers duct connection size. |
| | Sound attenuation material (AT) | P | With polyester fibre attenuation material |
| | | W | With mineral wool attenuation material |
| | | NA | Without attenuation material |

* Ordered separately

Quick selection

Values with adjustment module (MSM) fully open.

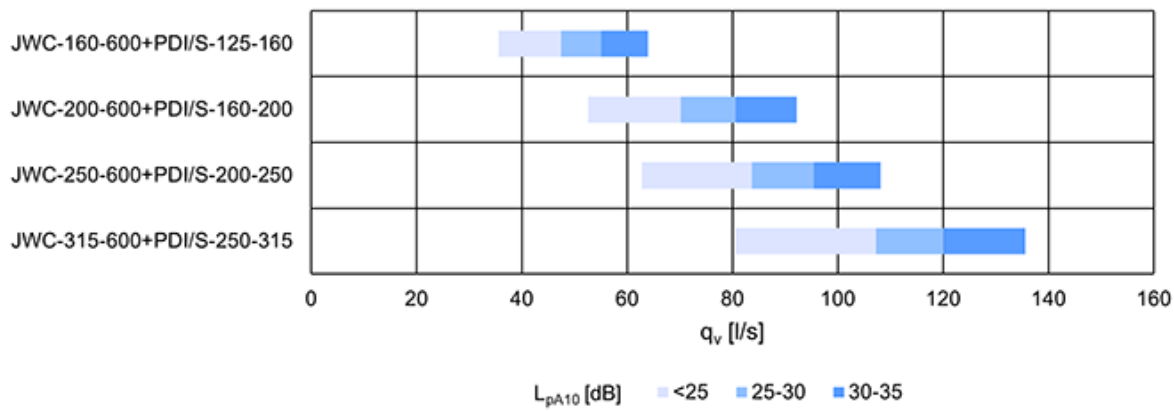


Fig. 2. Quick selection with unit l/s


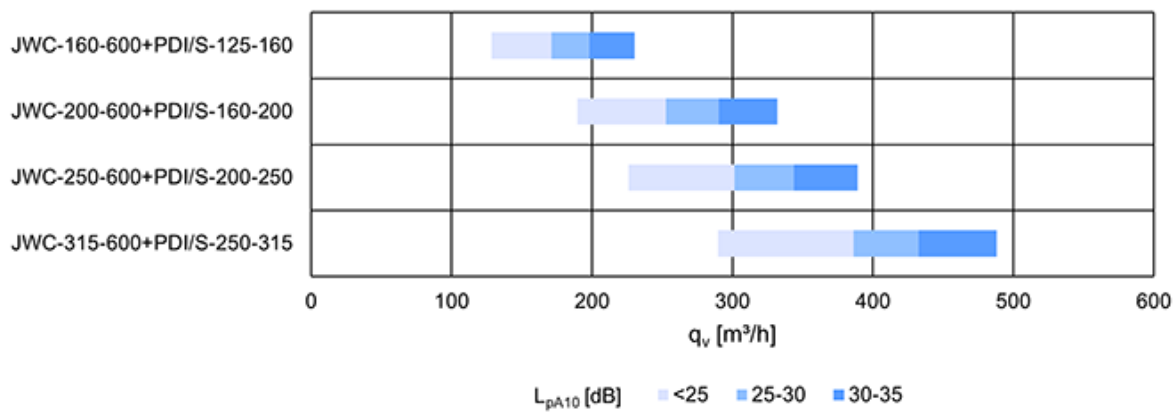


Fig. 3. Quick selection with unit m³/h

Structure and materials

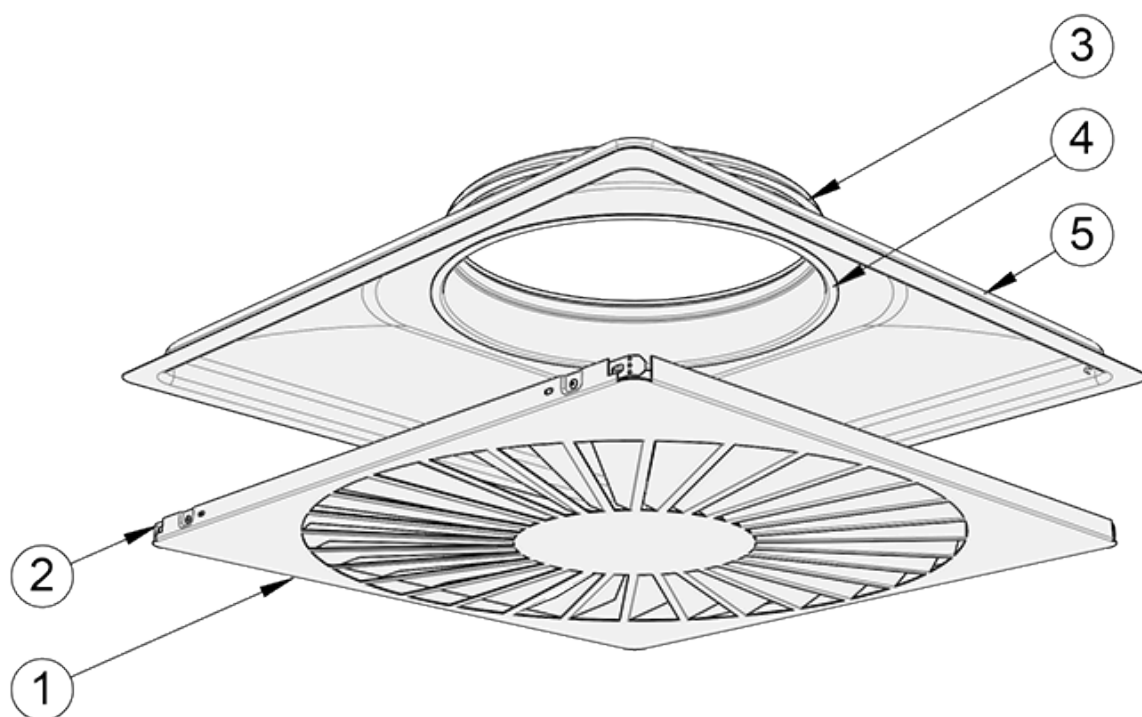

| No. | Part | Description | Note |
|-----|---------------------|---|---------------------------|
| 1 | Front panel | Polyester-painted steel, white (RAL 9003) | Special colours available |
| 2 | Front panel springs | Stainless steel | – |
| 3 | Duct seal gasket | Polymer | – |
| 4 | Spigot | Galvanised steel | – |
| 5 | Casing | Polyester-painted steel, white (RAL 9003) | Special colours available |

Dimensions and weight

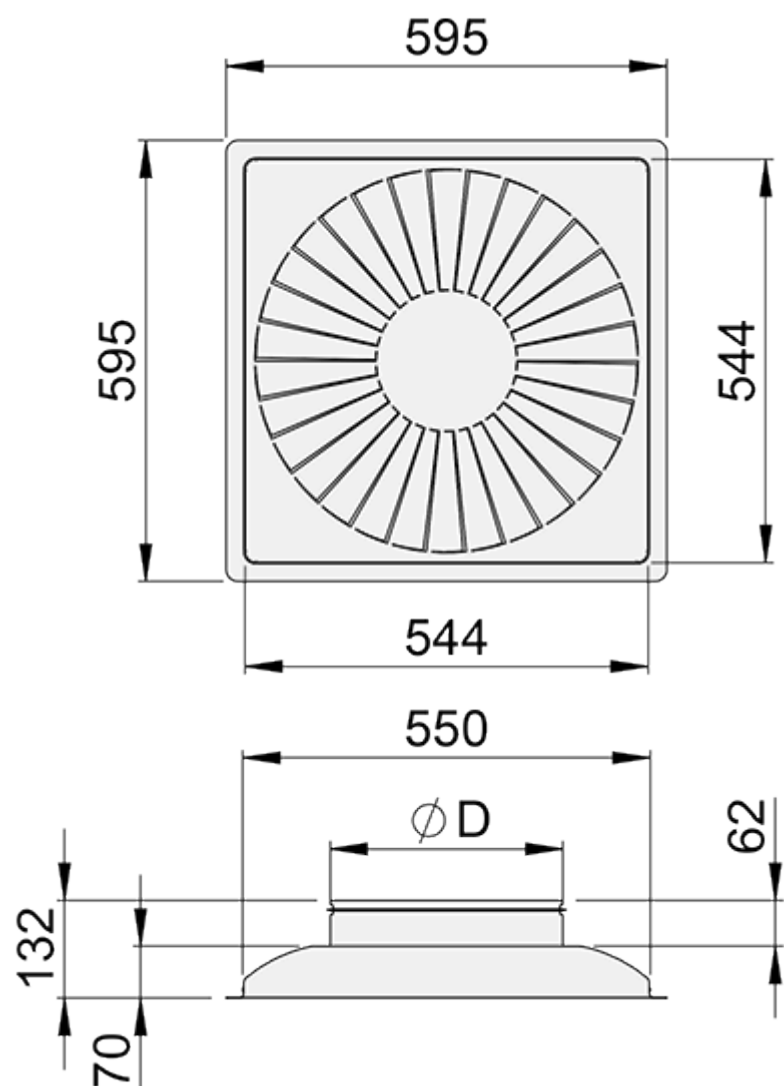


Fig. 2. Dimensions of Halton Jaz JWC diffuser

| JWC | $\varnothing D$ [mm] | Weight [kg] |
|---------|----------------------|-------------|
| 160-600 | 159 | 4.5 |
| 200-600 | 199 | 4.5 |
| 250-600 | 249 | 4.4 |
| 315-600 | 314 | 4.4 |

Halton Jaz JWC with Halton Pop PDI plenum

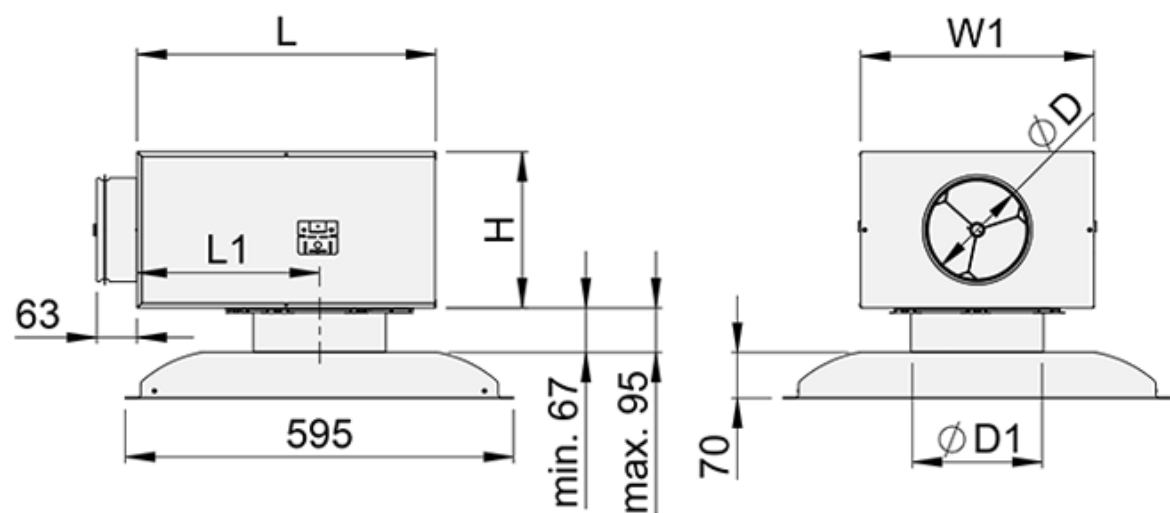


Fig. 3. Dimensions of Halton Jaz JWC with Halton Pop PDI plenum, externally positioned connection spigot

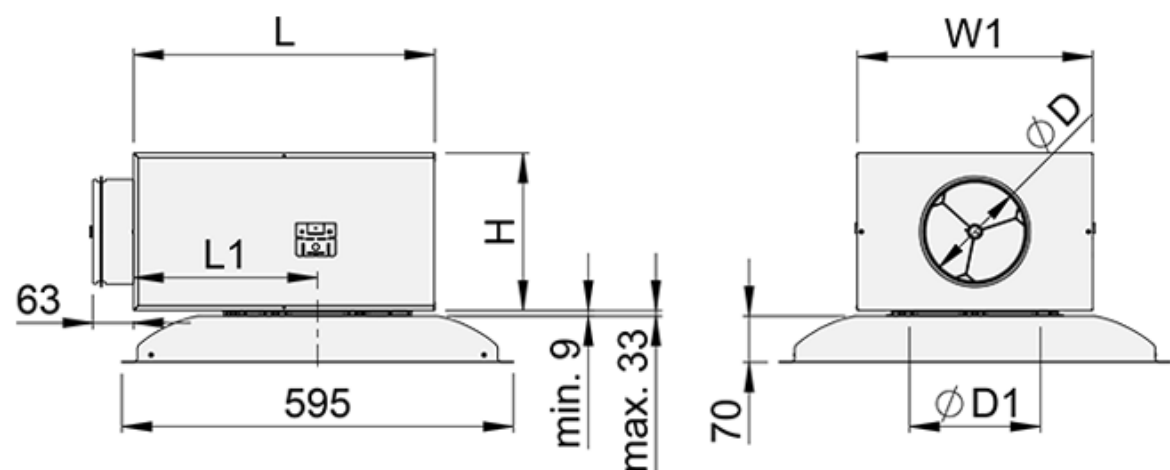


Fig. 4. Dimensions of Halton Jaz JWC with Halton Pop PDI plenum, internally positioned connection spigot

| JWC | PDI | ØD [mm] | ØD1 [mm] | L [mm] | W1 [mm] | H [mm] | L1 [mm] | Weight [kg] |
|---------|---------|------------|-------------|-----------|------------|-----------|------------|----------------|
| 160-600 | 125-160 | 124 | 162 | 308 | 282 | 172 | 168 | 7.2 |
| | 160-160 | 159 | 162 | 458 | 358 | 239 | 280 | 9.5 |
| 200-600 | 160-200 | 159 | 202 | 458 | 358 | 239 | 280 | 9.4 |
| | 200-200 | 199 | 202 | 458 | 358 | 239 | 280 | 9.5 |
| 250-600 | 200-250 | 199 | 252 | 458 | 358 | 239 | 280 | 9.3 |
| | 250-250 | 249 | 252 | 520 | 480 | 359 | 280 | 12.6 |
| 315-600 | 250-315 | 249 | 317 | 520 | 480 | 359 | 280 | 12.4 |
| | 315-315 | 314 | 317 | 520 | 480 | 359 | 280 | 12.6 |

Specification

Square diffuser with swirl function for false ceiling installation, fulfilling the following requirements:

Structure

- Front panel openable and removable to allow general maintenance and cleaning
- Front panel removable without special tools
- Swirl air distribution
- Unit width 595 mm, height 70 mm
- Inlet duct diameter 160, 200, 250 or 315 mm

Materials

- Casing and front panel manufactured from steel
- Casing and front panel white, powder painted in RAL 9003, 30 % gloss
- Connection spigot manufactured from galvanized steel
- Connection spigot equipped with fixed gasket

Model with balancing plenum

- Diffuser to be connected with a galvanised steel plenum Halton Pop PDI
- Plenum has integrated gasket to ensure airtight duct connection
- Plenum has a removable adjustment module MSM for supply or MEM for exhaust.

Packaging and identification

- The product is protected by removable plastic coating.

- The product is packed in a cardboard box.
- The product is identified by labels attached both to the product and the cardboard box.

Installation



Fig. 4. Halton Jaz JWC diffuser connected to a Halton Pop PDI plenum

The diffuser is available in size 595×595 mm for direct installation to the modular T-bar ceiling (600×600) either above or below the list.

The diffuser is connected usually to balancing plenum Halton Pop PDI (*Fig. 4*). Alternatively, it can be connected direct to the duct by riveting or screwing. In that case, minimum safety distance to the next T-branch or curve is three times the duct diameter (3xØD).

Commissioning



Fig. 5. Adjustment of airflow of diffuser and plenum combination.

The diffuser itself has no airflow adjustment. To adjust and measure the supply airflow rate, the diffuser shall be combined with Halton Pop PDI balancing plenum with measurement and adjustment module MSM. In case of exhaust air, use of adjustment module MEM is recommended. It is not possible to measure exhaust airflow rate with adjustment module MEM.

Open the front plate and pass the tubes and control spindle through the front panel (*Fig. 5*). Replace the front panel. Measure the differential pressure with a manometer. The flow rate is calculated using the formula below:

$$q_v = k\sqrt{\Delta p_m}$$

where

- q_v Airflow rate [l/s] or [m³/h]
- Δp_m Measured pressure [Pa]
- k The k factor given as a function of mounting and diameter (see the table below)

Adjust the airflow rate by rotating the control spindle until the desired airflow rate (pressure difference) is achieved.

Set the tubes and spindle back into the plenum. Damper position can be locked with a knurled head screw of the adjuster.

| Duct connection (PDI) | k factor for MSM adjuster, opening > 0, [l/s] | |
|-----------------------|---|---------|
| | > 8D | Min. 3D |
| 100 | 5.7 | 7.5 |
| 125 | 9.6 | 12.6 |
| 160 | 16.4 | 21.9 |
| 200 | 26.3 | 31.0 |
| 250 | 47.1 | 51.5 |
| 315 | 78.8 | – |

| Duct connection (PDI) | k factor for MSM adjuster, opening > 0, [m ³ /h] | |
|-----------------------|---|---------|
| | > 8D | Min. 3D |
| 100 | 20.6 | 27.0 |
| 125 | 34.4 | 45.4 |
| 160 | 59.0 | 78.8 |
| 200 | 94.8 | 111.6 |
| 250 | 169.5 | 185.4 |
| 315 | 283.6 | – |

Maintenance

Detach the front panel of the diffuser and let it balance on the hinges.

Wipe the diffuser casing and front panel with damp cloth.

Option with balancing plenum

Remove the measurement and adjustment module by gently pulling from the shaft; not from the control spindle or measurement tubes. Wipe the components with damp cloth instead of immersing in water. Wipe also the inner part of the plenum; detach the attenuation material if needed.

Reassemble the module by pushing the shaft until the unit meets the stopper.

After cleaning reattach the front panel.

Order code

JWC-D-A; CO-ZT

| Main options | |
|---|---------------------------|
| D = Diffuser duct connection size [mm] | 160, 200, 250, 315 |
| A = Diffuser size [mm] | 600 |
| Other options and accessories | |
| C = Colour | |
| SW | Signal white (RAL 9003) |
| X | Special colour (RAL xxxx) |
| ZT = Tailored product | |
| N | No |
| Y | Yes(ETO) |
| Sub products and accessories (ordered separately) | |
| Halton Pop PDI | Balancing plenum |

Order code example

JWC-160-600, CO=W, ZT=N