

HHR1000 – Commercial Hood for Residential Range



Overview

The HHR1000 commercial range exhaust hoods are integrated, pre-engineered fire suppression range hood systems introduced to the market. Using many components found in a full commercial hood, The HHR1000 hoods fulfill all of the theory and intent behind a Type I commercial hood with fire suppression, in a product designed for use over a residential-grade appliance. Our hoods incorporate a suppression system that is proven effective by using a mechanical system, a wet chemical agent, hardwired disconnect options, and alarm contacts. They're easy to install and are an ideal option for any cooking space using a residential-style range.

Applications

- Institutional & Limited Commercial Installations
- Common Kitchen Areas
- Colleges & Universities
- Day Care Centers
- Schools
- Elderly Communities Managed Care Facilities
- Group Homes
- Churches
- Fire Houses
- EMS Facilities
- Military HousingAny cooking space using a residential-style range in a, not for profit application

Listings



Features and Benefits

- HMI touchscreen display
- Stainless Steel finish
- Wall-mounted
- Ability to store multiple passwords for multiple users
- Multiple power disconnect options
- May be used as a standalone option or in conjunction with our hood systems




Addressing fire safety for residential ranges in commercial spaces!


[View Brochure](#)

Dimensions

HHR103X Standard

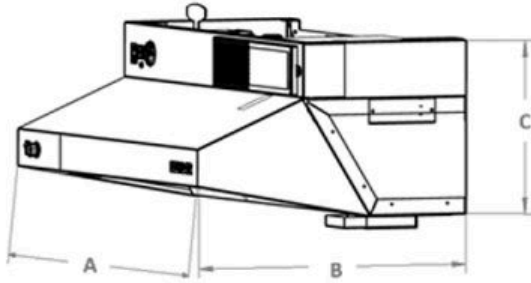

HHR103X NFPA Option

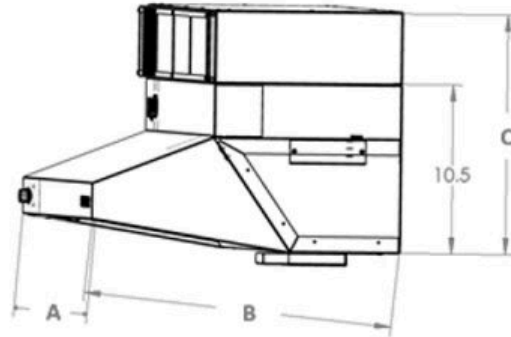

| MODEL | MOUNTING CONFIG. | MOUNTING HEIGHT (in) | (A) LENGTH (in) | (B) DEPTH (in) | (C) HEIGHT (in) | LENGTH (lbs) |
|-----------------------|------------------|----------------------|-----------------|----------------|-----------------|--------------|
| HHR1030-F Standard | WALL | MIN: 24 MAX: 30 | 30 | 19.38 | 10.5 | 53.4 |
| HHR1030-F NFPA | | | | | 14.8 | 75 |
| HHR1030-R Standard | | | | | 10.5 | 53.4 |
| HHR1030-R NFPA | | | | | 14.8 | 75 |
| HHR1030-D-IF Standard | | | | | 10.5 | 53.4 |
| HHR1030-D-IF NFPA | | | | | | |
| HHR1030-D-RF Standard | | | | | | |
| HHR1030-D-RF NFPA | | | | | | |
| HHR1030-D-WF Standard | | | | | | |
| HHR1030-D-WF NFPA | | | | | | |

| MODEL | MOUNTING CONFIG. | MOUNTING HEIGHT (in) | (A) LENGTH (in) | (B) DEPTH (in) | (C) HEIGHT (in) | LENGTH (lbs) |
|-----------------------|------------------|----------------------|-----------------|----------------|-----------------|--------------|
| HHR1036-F Standard | WALL | MIN: 30 MAX: 36 | 36 | 19.38 | 10.5 | 56.8 |
| HHR1036-F NFPA | | | | | 14.8 | 78.8 |
| HHR1036-R Standard | | | | | 10.5 | 56.8 |
| HHR1036-R NFPA | | | | | 14.8 | 78.8 |
| HHR1036-D-IF Standard | | | | | 10.5 | 56.8 |
| HHR1036-D-IF NFPA | | | | | | |
| HHR1036-D-RF Standard | | | | | | |
| HHR1036-D-RF NFPA | | | | | | |
| HHR1036-D-WF Standard | | | | | | |
| HHR1036-D-WF NFPA | | | | | | |